
ALUMINIUM SCAFFOLDING - DOUBLE WIDTH 13M TOWER HEIGHT




Features:

- The Double width Mobile tower is ACE,s scaffold system which has various applications for both interior and exterior use.
- The maximum working height for interior and exterior work is 17 meter
- Built in integral ladder frame, braces welded not crimped.
 Heavy duty claws on braces with fast release clip-trigger mechanism.
- Safe working load is 270Kg per platform and the total weight including the tower is 850Kg.
- The frames are connected with rigid spigot straight for easy assembling and dismantling along with locking pins to prevent accidental removal of frames.
- Caster wheels 200mm has a foot operated dual brake system and can easily be locked and released.300mm adjustable leg with self cleaning thread.
- The towers are equipped with standard & trapdoor platform along with aluminum or wooden toe board.
- Frame Width available 1.2, 1.4, 1.5, 1.7 & 2.0 meter
- Frame Length available 1.5, 2.0 & 2.5 meter.

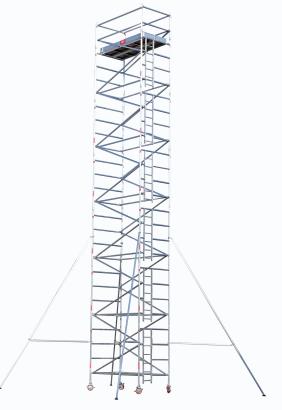


Description:

SN.	Description of goods	Qty	Weight (Kg)	СВМ
	ALUMINUM LADDER FRAME MOBILE SCAFFOLDING DOUBLE WIDTH 13mtr TOWER HEIGHT AS PER BRITISH STANDARD W:1.40Mtr, L:2.50Mtr, Tower Ht:13.3Mtr, Platform Ht:12.3Mtr, Reach Ht:14.3Mtr	1 Set		
1.	Aluminum Double Width 4 Rung Ladder Frames 140W x 200cmH	6	60	1.68
2.	Aluminum Double Width 4 Rung Span Frames 140W x 200cmH	6	50.4	1.32
3.	Aluminum Double Width 2 Rung span Frames 140W x 100H	2	6.6	0.22
4.	Anti Slip Working Platform Trapdoor size 250x55 cm	1	17.2	0.22
5.	Anti Slip Working Platform plain standard type 250x55 cm	1	17	0.22
6.	Diagonal Braces 270cm long	24	43.2	0.192
7.	Horizontal Braces 250cm long	16	24	0.096
8.	Heavy duty Castor wheels with dual brakes (8")	4	21.2	0.04
9.	Adjustable jack 50cm long	4	6	0.04
10.	Stabilizer 6m	4	28	0.96
11.	Wooden toe board	1	1.9	0.002
12.	Snap pin	24	0.24	
	Total	93	275.74	4.99



Highly Versatile with variable heights and ready to errect

Double width with built in ladder SWL = 270kg per platform / 850 kg per tower

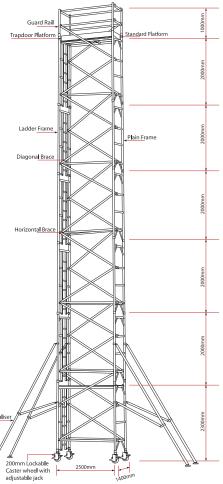

adjustable jack		
DW-250 x 140 / 13		
14.3 m		
13.3 m		
12.3 m		
1.40 m		
2.5 m		





Guard Rail



Platform Door





Agjustable Base jack

