## ALUMINIUM SCAFFOLDING - SINGLE WIDTH 3M TOWER HEIGHT



## Features


- ACE's Single Width Scaffold Tower offer an excellent solution with its 80 Cm wide frames for narrow spaces.
- The Maximum working height for interior and exterior work is 10mtr.
- Safe working load is 175Kg per platform and the total weight including the tower is 550Kg.
- The platform is secured with wind anchor.
- The frames are connected with rigid spigot straight for easy assembling and dismantling along with locking pins to prevent accidental removal of frames.
- Frame Width Available 0.60, 0.80, 0.90 & 1.00 meter
- Main Frame Heights available 1.5, 2.0 meter.
- Frame Length available 1.5, 1.8, 2.00 & 2.5 meter.



Our access equipment products are manufactured to BS EN.

## **Description:**

SN.	Description of goods	Qty	Weight (Kg)	СВМ
	ALUMINUM LADDER FRAME MOBILE SCAFFOLDING SINGLE WIDTH 3mtr TOWER HEIGHT AS PER BRITISH STANDARD	1 Set		
	W:0.80Mtr, L:1.80Mtr, Tower Ht:3.3Mtr, Platform Ht:2.3Mtr, Reach Ht:4.3Mtr			
1.	Aluminum Single Width 4 Rung Ladder Frames 80Wx200cmH	1	7.3	0.12
2.	Aluminum Single Width 4 Rung Span Frames 80Wx200cmH	1	7	0.12
3.	Aluminium Single width 2 Rung span Frames 80W x 100H	2	13.2	0.44
4.	Anti Slip Working Platform Trapdoor 180x55cm	1	11.5	0.16
5.	Diagonal Braces 202cm long	2	3.6	0.016
6.	Horizontal Braces 180cm long	6	10.2	0.042
7.	Heavy duty Castor wheels with dual brakes (8")	4	21.2	0.04
8.	Adjustable jack 50 cm long	4	6	0.04
9.	Wooden toe board	1	1	0.0008
10.	Snap pin	4	0.16	
	Total	26	81.16	0.9788

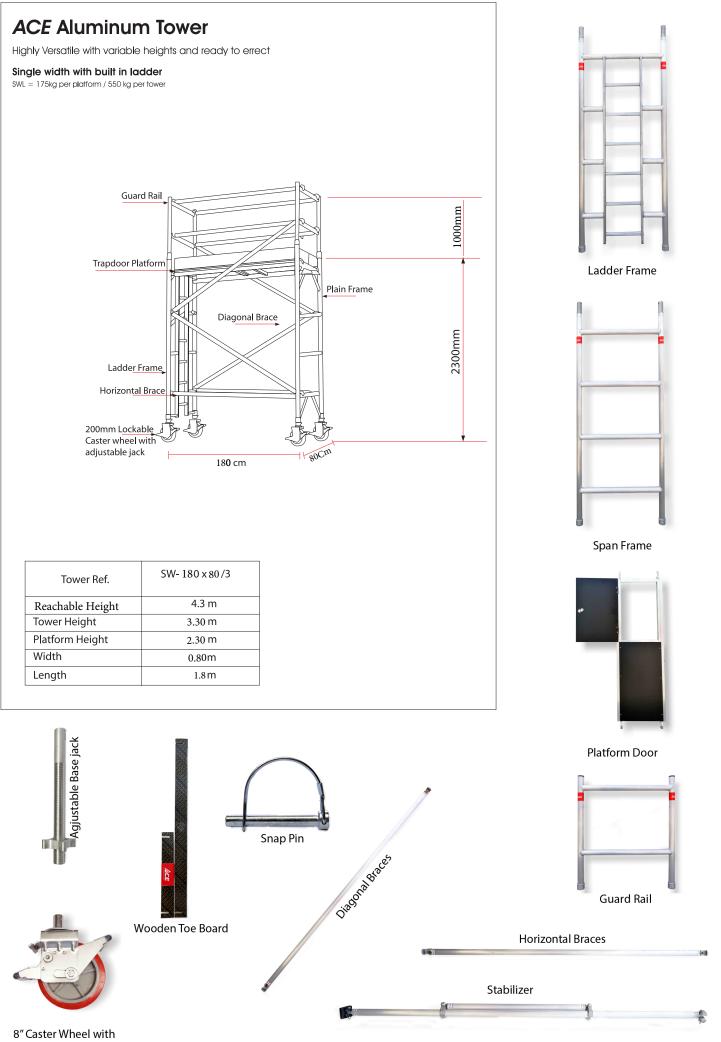

Dual Brake